




V1.2

--
--
--

KE-GT(30-40)KTL4

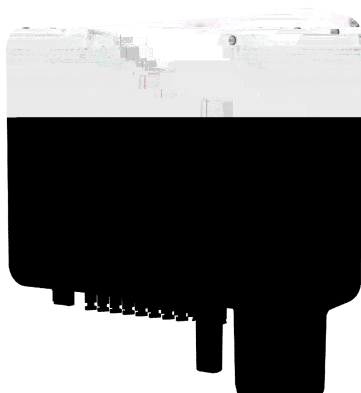



1		6
2		10
3		16
4		24
5		25
6		29
7		32
8		33

1

1.1

▪

▪

▪

▪

▪

▪

▪

▪

▪

▪

▪


▪

▪

■



1.3

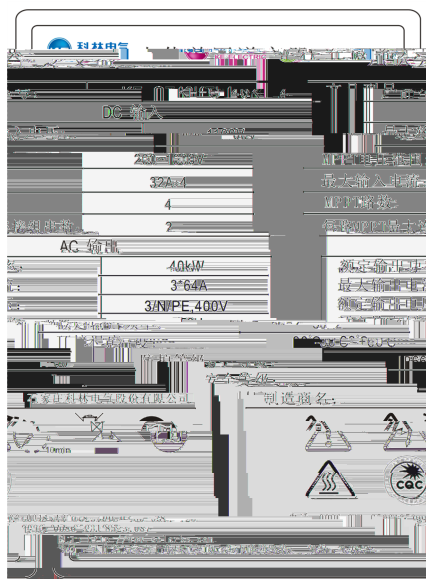

[illegible]

2

2.1







2.2






2.3



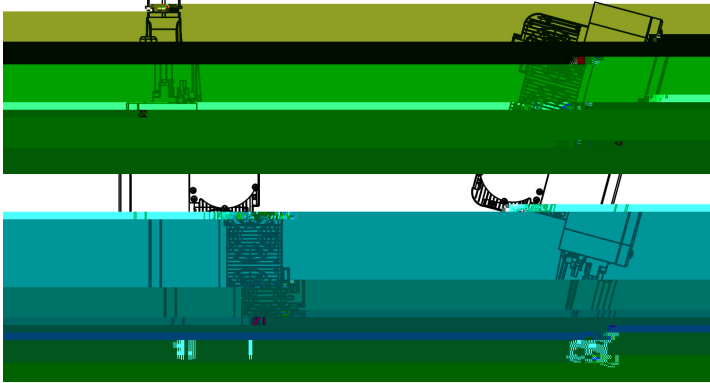
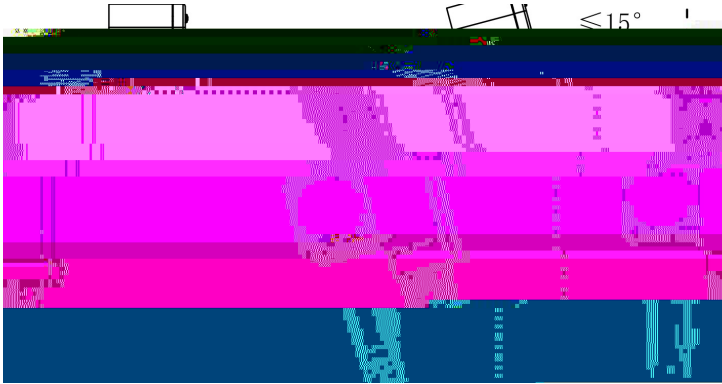





2.4

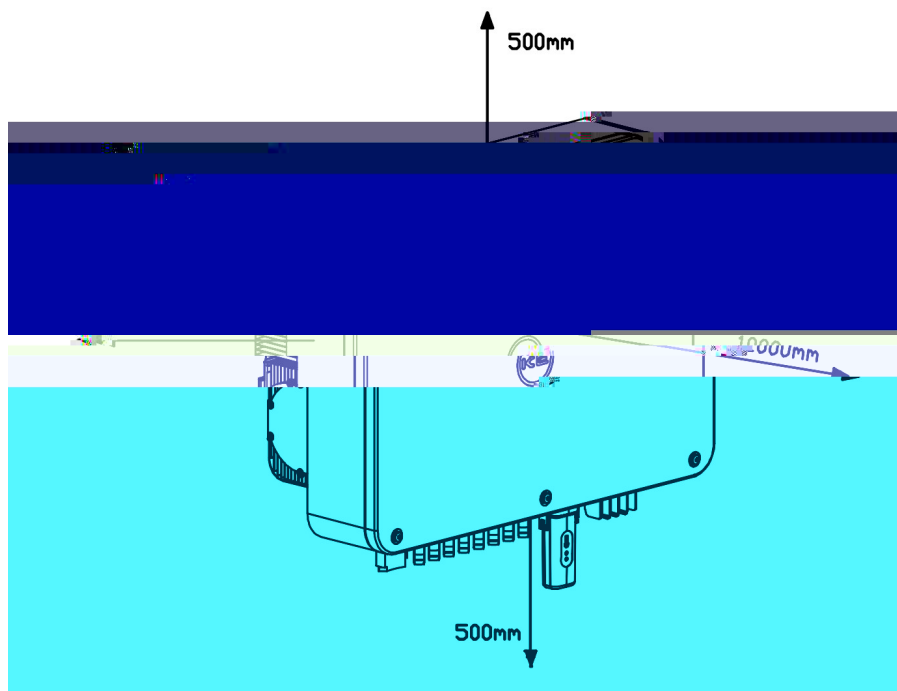

2.5

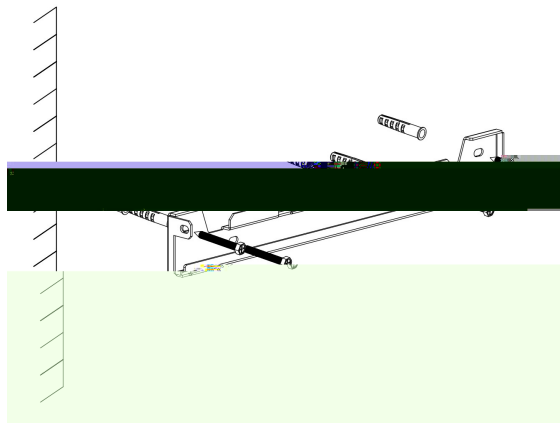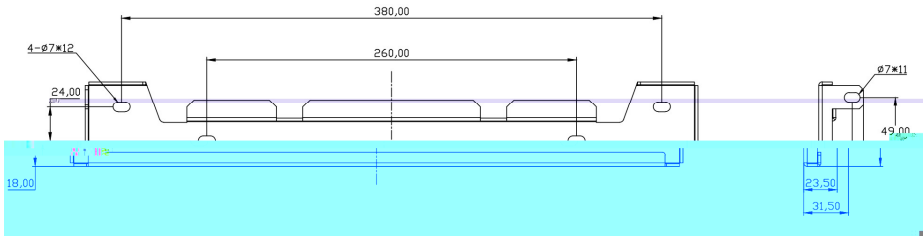


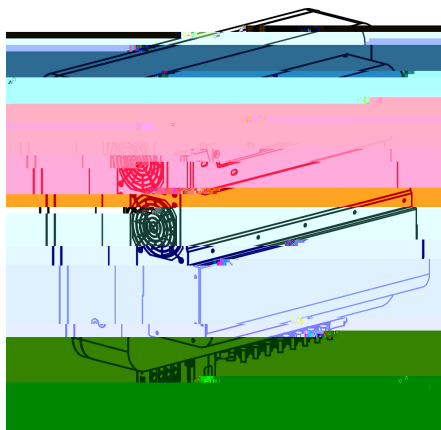





紧固螺丝




3

3.1

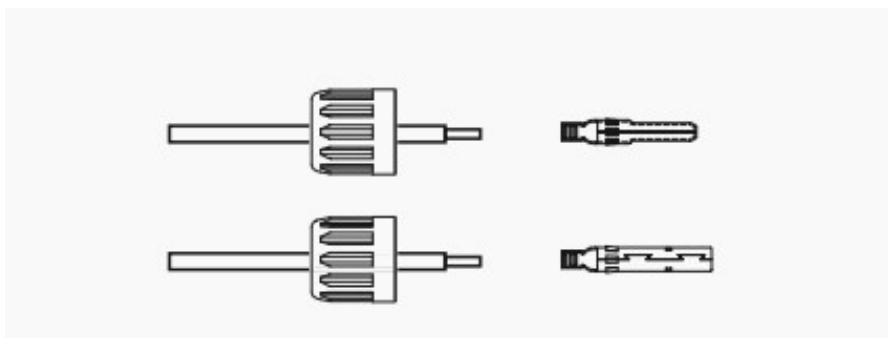
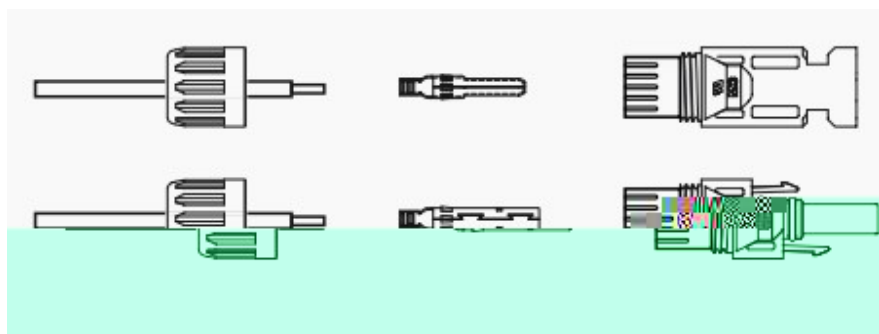


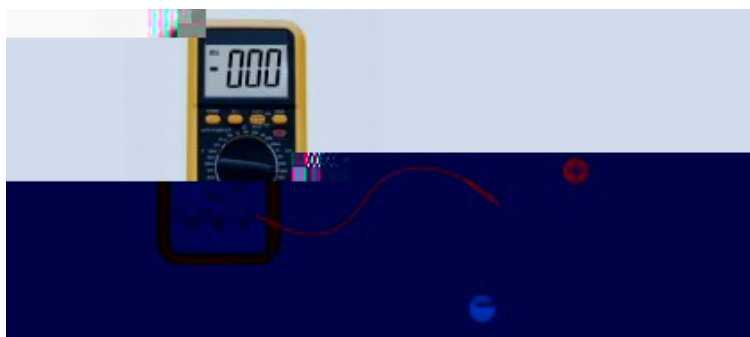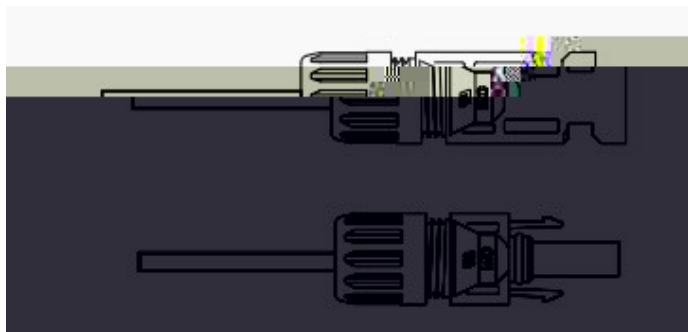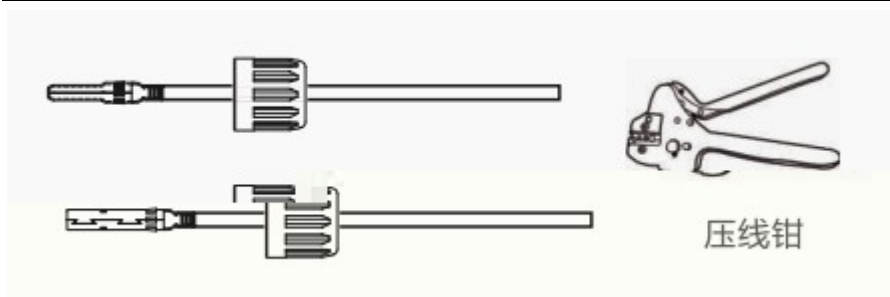

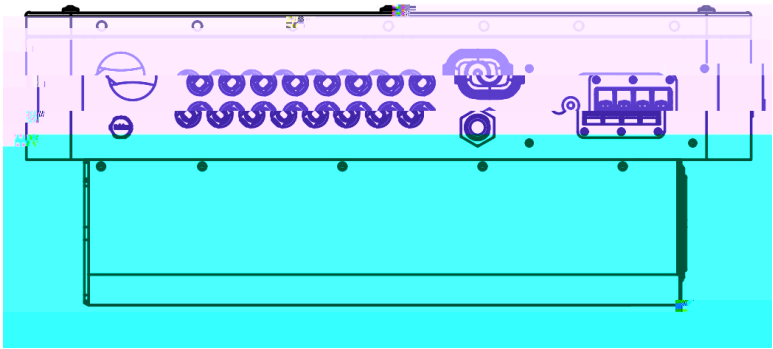


3.3




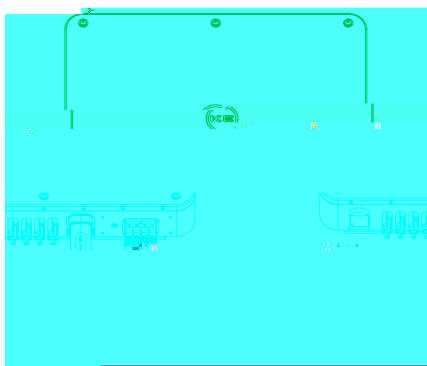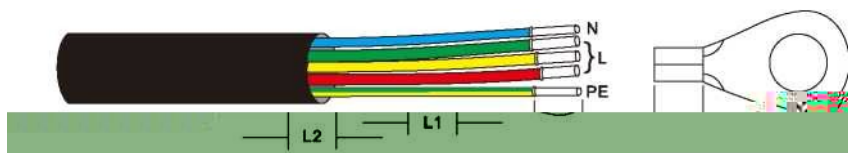

4~6Nm

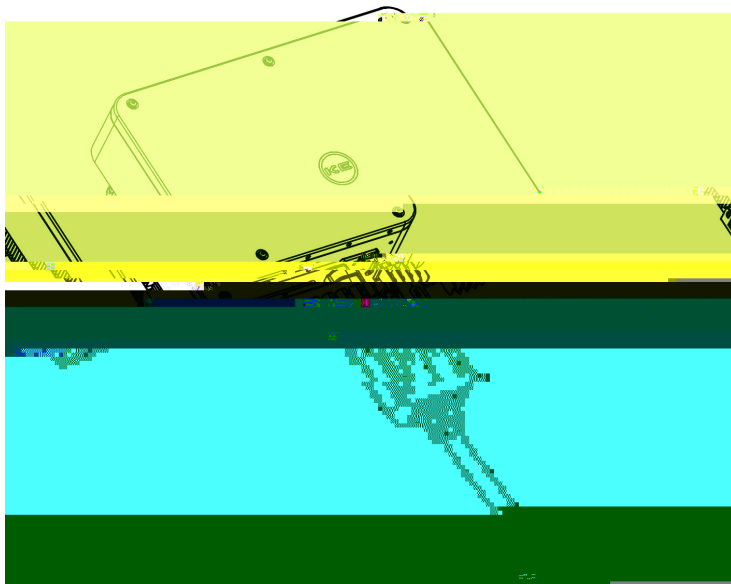

3.4 RS485


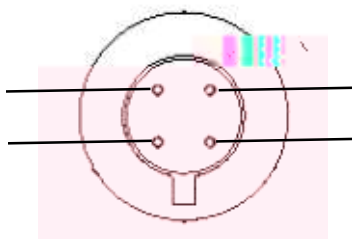



3.5



重要:


对于并联的多个逆变器，所有逆变器应连接到同一接地点，以确保接地线等电位连接。

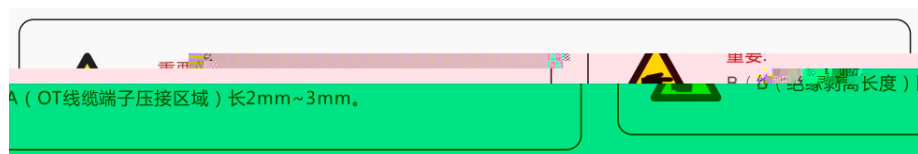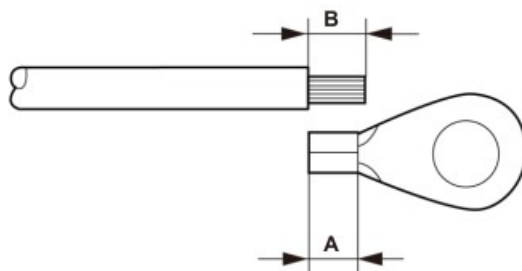

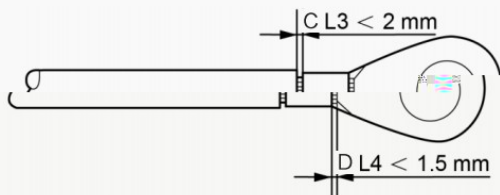

重要:

将端子压接到线缆后，检查连接以确保端子牢固地压接到线缆上。

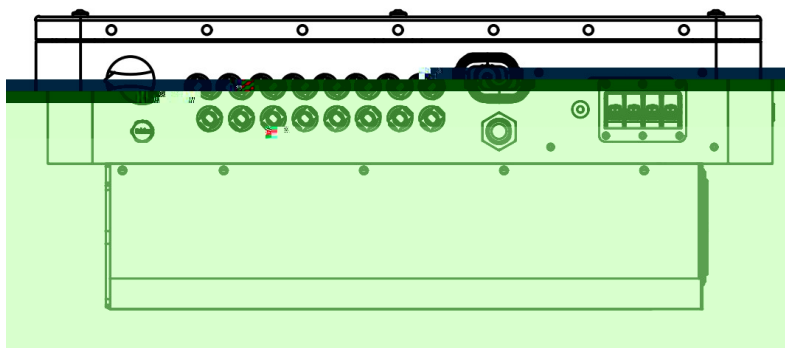

重要:

为提升防腐性能，安装接地线后，建议涂上硅胶或涂料。

4

4.1

4.2

5

5.1



09:11 注册

您好，
欢迎登陆光伏云管家

手机号/用户名

密码

☐ 记住密码 [忘记密码?](#)

09:11 注册

< 注册

请输入手机号 [获得验证码](#)

输入验证码

请输入6~12位密码

再次输入密码

注册

09:11

注册


您好，
欢迎登陆光伏云管家

手机号/用户名

密码

忘记密码？

记住密码

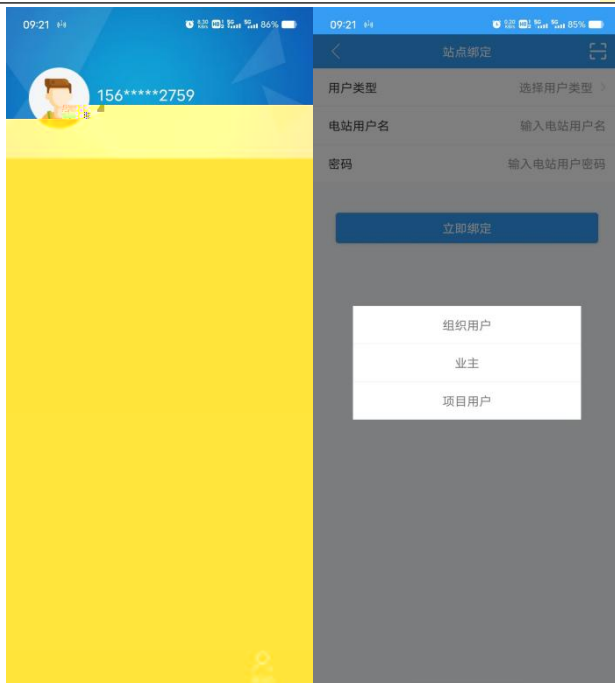

5.2

[illegible]

--	--



